

revolution RTP10

Two - Post Lift / 10,000 lbs. capacity




Shown:
RTP10N300
10,000 lbs.
(4535kg capacity)

FEATURES:

- 3-stage Spot-Rite™ front arms - enable techs to spot vehicles asymmetrically or symmetrically. Position vehicles doors in front or behind lift columns to prevent door damage.
- Top mounted pull design cylinder protects piston inside of carriage
- Two full-stroke cylinders with overhead cable for equalization
- Spring operated arm restraints, disengage at floor level
- Padded overhead switch bar
- Single point lock release


RTP10 Spot-Rite™ 3-Stage Front Arm Design

Position the vehicle doors in front of or behind the lift columns to allow easy technician access!

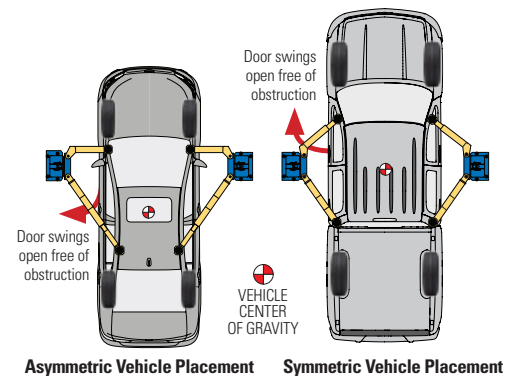

Low-Profile Adapter Design

The RTP10 features low-profile, oversized pads with extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 1.75", 3.5" and 5" (44mm, 89mm, 127mm). Includes storage bracket.



Gold Certified

Revolution's RTP10 is ALI Certified. The RTP10 lift meets the highest industry safety and performance standards. Look for the Gold label.

Specifications	RTP10
Capacity	10,000 lbs. (4535kg)
Rise	71 -1/8" (1806mm)
Maximum Rise	76 -1/8" (1934mm) with 5" extension
Overall Height	143" (3632mm)
Overall Width	131" or optional 137" (3327/ 4380mm)
Drive Through Clearance	99" or optional 105" (2515 / 2667mm)
Overhead Switch Height	137-5/8" (3496mm)
Front Reach (Min/Max)	23" / 44 -1/2" (584mm / 1130mm)
Rear Reach (Min/Max)	36" / 58" (914mm / 1473mm)
Min/Max Adapter Height	3-5/8" (792mm) no adapter extension 8-5/8" (219mm) w/ 5" adapter extension
Width Inside Column	109" or optional 115" (2769mm / 2921mm)
Voltage/Amps	208/230,15 amps; 208/230,16 amps
Motor/Phase	1ph*/2HP/50Hz; 1ph*/2HP/60Hz
Ceiling Height Required	144" (3658mm)

*Optional 3-phase available.

revolution

www.revolutionlift.com

- 2700 Lanier Drive Madison, IN 47250
- phone: 812.273.1622 ■ sales@revolutionlift.com



Li# REVOLUTION RTP10_RTP12 cutsheet_2016.01

©2016 Vehicle Service Group™. Printed in the U.S.A., All Rights Reserved. Unless otherwise indicated, Revolution Lift®, Vehicle Service Group™, DOVER and all other trademarks are property of Dover Corporation and its affiliates.

revolution RTP12

Two - Post Lift / 12,000 lbs. capacity

FEATURES:

- 3-stage front and rear arms
- Single point lock release
- Two full-stroke cylinders
- Overhead cable for equalization
- Padded overhead height limit switch bar
- Higher rise - up to 80-3/4" (2051mm)
- Adjustable overhead heights available*
- Adjustable width and drive-thru settings
- Spring operated arm restraints, disengage at floor level

Low-Profile Adapter Design

The RTP12 features low-profile, oversized pads with extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 1.75", 3.5" and 5" (44mm, 89mm 127mm). Includes storage bracket.



Shown:
RTP12N200
12,000 lbs.
(5443kg) capacity

Specifications	RTP12
Capacity	12,000 lbs. (5443kg)
Rise	75-3/4" (1924mm)
Maximum Rise	80-3/4" (2051mm) w/ 5" extension
Adjustable Overall Height Options	166" (4216mm) Standard Height 178" (4521mm) Extended Max. Height* 154" (3912mm) LH1 143" (3632mm) DP
Overall Width	140" - 146" (3556 - 3708mm)
Drive Through Clearance	108-3/4" (2762mm) or optional 102-3/4" (2610mm)
Overhead Switch Height Options	160-1/8" (4067mm) Standard 172-1/8" (4524mm) Extended* 148-1/8" (3762mm) LH1 137-1/8" (3483mm) DP
Front Reach (Min./Max.)	27-3/4" min / 59" max (705mm / 1460mm)
Rear Reach (Min./Max.)	27-3/4" min / 59" max (705mm / 1460mm)
Lifting Pad Height (Min./Max.)	4-3/4" (121mm) with no extension 9-3/4" w/ 5" extension (248mm)
Width Between Columns	120-7/8" (3070mm) Standard 114-7/8" (2918) Optional
Voltage/Amps	208/230, 15 amps; 208/230, 16 amps
Motor/Phase	1ph** / 2HP / 50Hz 1ph** / 2HP / 60Hz
Speed of Rise	60 seconds

*Hose and cable kit required **Optional 3-phase available

Gold Certified

Revolution's RTP12 is ALI Certified. The RTP12 lift meets the highest industry safety and performance standards. Look for the Gold label.

revolution®

www.revolutionlift.com

- 2700 Lanier Drive Madison, IN 47250
- phone: 812.273.1622 ■ sales@revolutionlift.com