



# Quick Service Lifts

7,000 lbs. Capacity Moveable Pad Lift



## Faster Service. More Revenue.

The quick service pad lift includes time saving features that help get your customers in and out fast with efficient, no-appointment necessary maintenance and routine service. The ultra-low profile, easy to adjust pad minimizes drive-over clearance and allows vehicles to be spotted quickly, easily and accurately.

The standard SPOA7-MP two-post features true asymmetric, "Double S" columns for easy door opening and added strength, a padded overhead shut off bar and rugged, time tested construction.

*And it's only from Rotary Lift.*



Model SPOA7X  
7,000 lbs. capacity drive over lift



Lift pads accommodate most unibody vehicles



### Adjustable Drive-Over Pad

Spotting a vehicle is quick with easy to move pads.



Model SPOA7X  
7,000 lbs. capacity drive over lift

**The World's Most Trusted Lift™**


[www.rotarylif.com](http://www.rotarylif.com)

# Quick Service Lifts 7,000 lbs. Capacity

## SHOCKWAVE-Equipped Lifts Include:

- 2 Times Faster Rise and Descent\*
- Spotline™ Laser Spotting System
- 110v DC Power

### Adjustable Drive-Over Pad MAKES QUICK SERVICE WORK AS EASY AS 1-2-3!

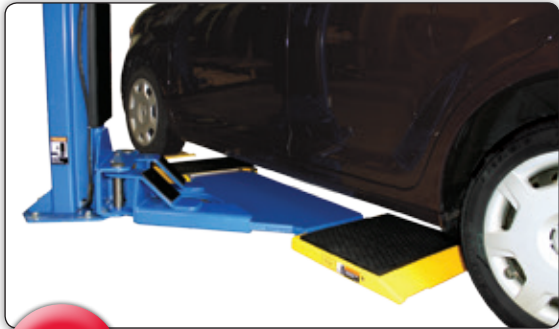

**1**

Low drive-over clearance of 2-5/8" minimizes vehicle spotting time



**2**

Rubber spacer blocks (included with the lift) provide additional clearance when needed.




**3**

Raise the vehicle for quick service.


\* 2 X FASTER BASED ON RISE & DESCENT OF "STANDARD" TWO-POST LIFTS.

## IMPROVE YOUR REACH!

### Maximum pad measurements

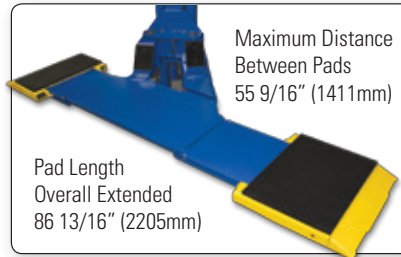


### Minimum pad measurements

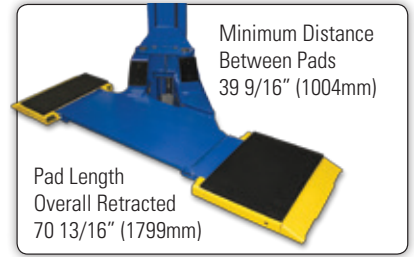

Model Specifications	SPOA7-MP	SPOA7-MPSW
Lifting Capacity	7,000 lbs. (3157kg)	7,000 lbs. (3157kg)
Lifting Capacity (per platform)	3,500 lbs. (1588kg)	3,500 lbs. (1588kg)
A. Rise**	74"-77" (1880-1956mm)	74"-77" (1880-1956mm)
B. Width Overall	11' 5 3/8" (3489mm)	11' 5 3/8" (3489mm)
C. Floor to Top of Overhead	Standard 11' 8 1/2" (3569mm)	11' 8 1/2" (3569mm)
	EH1 12' 8 1/2" (3874mm)	12' 8 1/2" (3874mm)
	EH2 13' 8 1/2" (4178mm)	13' 8 1/2" (4178mm)
C.5 Cylinder at Full Rise	Standard 11' 10 3/4" (3625mm)	
	Extended Option 12' 4 3/4" (3778mm)	12' 4 3/4" (3778mm)
D. Width Between Columns	107" 1/4" (2724mm)	107" 1/4" (2724mm)
E. Floor to Overhead Switch	11' 2 3/4" (3423mm)	11' 2 3/4" (3423mm)
F. Drive Over Clearance	2 5/8" (67mm)	2 5/8" (67mm)
G. Drive-Thru Clearance	79" (2007mm)	79" (2007mm)
H. Outside of Pad to Outside of Pad	78 1/2" (1994mm)	78 1/2" (1994mm)
I. Inside of Pad to Inside of Pad	37 1/8" (968mm)	37 1/8" (968mm)
J. Pad Length Overall Retracted	70 13/16" (1799mm)	70 13/16" (1799mm)
	Pad Length Overall Extended	86 13/16" (2205mm)
K. Minimum Distance Between Pads	39 9/16" (1004mm)	39 9/16" (1004mm)
	Maximum Distance Between Pads	55 9/16" (1411mm)
Motor Performance	2hp	5hp
Voltage Single Phase***	208/230v	110/120v
Speed of Rise	45 seconds	25 seconds

\*\* Rise is measured to top of pad Rise dimensions increase by 3" with extended rise options  
NO PAD: 74" 1 1/2" PAD: 75 1/2" 3" PAD: 77"

\*\*\* Optional 3-phase electric available

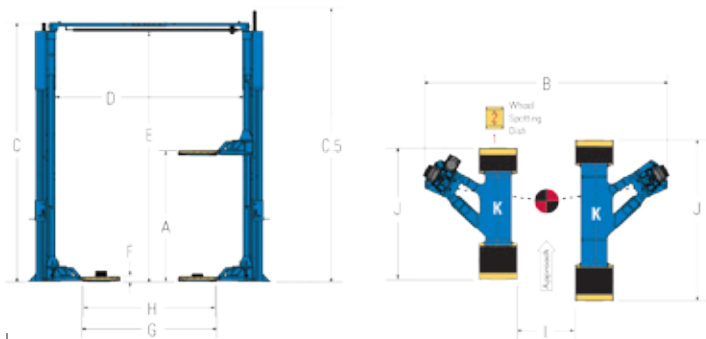

#### North / South America Contact Information

Sales: p 800.640.5438  
e userlink@rotarylif.com  
Tech. Support: p 800.445.5438  
e techlink@rotarylif.com

#### Global Contact Information

USA: 1.812.273.1622  
Canada: 1.905.812.9920  
Latin America / Caribbean: 1.812.273.1622  
Brazil: +55.11.4534.1995

**Rotary Lift**  
2700 Lanier Drive  
Madison, IN 47250, USA



#### Assistance for Government Purchasing

Government Sales: 800.445.5438 X5655

For additional world wide contact information and a complete guide to our product offering, visit us on the web at [rotarylif.com](http://rotarylif.com).



Contract No. 061015-RRL



Lit# Rotary\_SPOA7\_MPs\_Cutsheet\_2016.04  
(SUPERCEDES Lit# MP\_2PMoveablePads\_Brochure\_2013.02)  
©2016 VEHICLE SERVICE GROUP™, Printed in U.S.A., All Rights Reserved.  
Unless otherwise indicated, ROTARY LIFT, VEHICLE SERVICE GROUP™, DOVER and all other trademarks are property of Dover Corporation and its affiliates.