

Available with SHOCKWAVE™



SP016 CARGO 2-Post Lift

SUPER DUTY SYMMETRIC LIFT
16,000 lbs. CAPACITY



**NEW SUPER DUTY SYMMETRIC LIFT WITH
WIDER DRIVE THRU FOR TRUCKS AND VANS**

*Setting the mark for reliability
and quality in heavy duty lifts.*



Model shown:
SP016U0A0BL / 16,000 lbs. capacity
SHOCKWAVE-EQUIPPED 2-post lift

LOW CEILING MODEL AVAILABLE

**SERVICE LONGER VAN WHEELBASES WITH EASE!
NEW SP016 CARGO LIFTS FEATURE
HEAVY DUTY 3-STAGE ARMS
WITH A GREATER
SPOTTING RANGE.**

*Shown with adjustable
thread up adapters*



74 13/16"
maximum reach

36 13/16"
minimum reach



The World's Most Trusted Lift™
www.rotarylif.com



SP016 CARGO 2-Post Lift

Model:



SP016 CARGO*
3-STAGE Arms
 Truck Adapters

SHOCKWAVE Models

SP016 CARGO -SW

Lifting Capacity	16,000 lbs. (7257kg)
Max. Load (per arm)	4,000 lbs. (1814kg)
Rise*	
Min. Truck Adapter Height	76 29/32" (1953mm)
Max. Truck Adapter Height	77 29/32" (1979mm)
Height Overall:	
Standard Adjustments	15' to 16' 6" (4572-5029mm)
Low Ceiling (LC)	13' 6" to 14' 6" (4115-4420mm)
Width Overall (outside to outside of base plates)	
Narrow	12' 11" (3937mm)
Standard	13' 5" (4089mm)
Wide	13' 11" (4242mm)
Wide width setting provides greatest tire clearance for shorter wheelbases	
Narrow Drive-Thru Clearance	105 11/32" (2677mm)
Standard Drive-Thru Clearance	111 11/32" (2829mm)
Wide Drive-Thru Clearance	117 11/32" (2981mm)
Floor To Overhead Switch	15' 10 13/16" (4851mm)
Reach / Front Arm Min./Max.	36 13/16" (935mm) / 74 13/16" (1900mm)
Reach / Rear Arm Min./Max.	36 13/16" (935mm) / 74 13/16" (1900mm)
Min./Max. Truck Adapter Height*	4 29/32" to 5 29/32" (125-150mm)
Min./Max. Low Step Height* WITH 5" ADAPTER EXTENSION	9 29/32" to 10 29/32" (252-277mm)
Min./Max. High Step Height* WITH 10" ADAPTER EXTENSION	14 29/32" to 15 29/32" (379-404mm)
Inside Columns	
Narrow	120 15/32" (3061mm)
Standard	126 15/32" (3213mm)
Wide	132 15/32" (3366mm)
Motor / Voltage**	4 HP / 208v-230v
With SHOCKWAVE	5 HP / 110v
Time of Full Rise	81 seconds at full capacity
With SHOCKWAVE***	60 seconds at full capacity 36 seconds at half capacity
Time of Descent	20 seconds for all vehicle weights
Ceiling Height Required: Standard	15' 2" to 16' 8" (4576-5080mm)
Low Ceiling (LC)	13' 8" to 14' 8" (4166-4470mm)
Min. Bay Size	15' x 30' (4572 x 9144mm)
Total Product Weight	3,500 lbs.

LIFT FEATURES


Multiple lift height options:

Standard: 15' to 16' 6" / Low ceiling: 13' 6" to 14' 6"


Three column width options: 12' 11" / 13' 5" / 13' 11"

- Air operated single point lock release
- Available with SHOCKWAVE™
- Rise height of over 75"
- 20 second lowering time - at any load
- Locking system engages every 4"
- Thread up adapters for easy contact
- Four (4) 5" adapter extensions and two (2) 10" extensions for added lifting height and reach
- Original "Double S" column design
- ALI Gold Certified

Clip-on rubber pads for adapters to spot unibody passenger cars. Set of four (4) standard.



Ultra-strong 10" (2 each) and 5" (4 each) stackable adapter extensions are included.

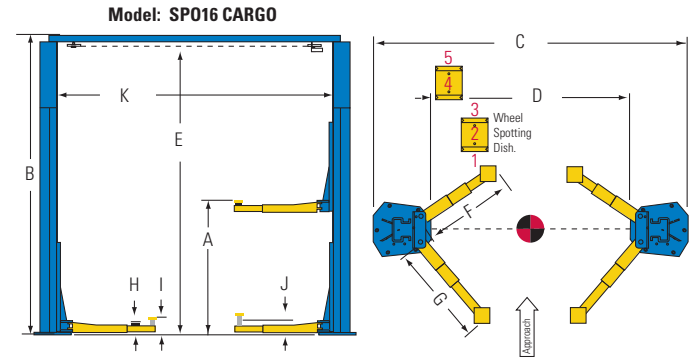

***NOTE:** Level bay floors provide the best underbody clearance needed to accommodate the broadest range of vehicles to spot and lift. Wide setting installations create the best tire clearance on shorter wheelbases. Vehicle axle weight **MUST NOT EXCEED** one half of total lift capability. Maximum arm load is 1/4 of lift rated capacity. SP016 Cargo lifts are designed for most class 4 and 5 vehicles. Some vehicles within each class may exceed arm capacity but not the lift capacity. Please consult vehicle axle information and lift manual for more information.

• Rise is measured from floor to adapter pick up area in lowest and highest position

**Optional DC SHOCKWAVE battery power available

***Actual rise times may vary depending on vehicle weight

*Adapter heights measure floor to adapter pick up area in lowest and highest adapter positions.

Included are 5" and 10" extension measurements.

Standard color of lifts are blue and red unless otherwise noted. Gray and black are available at no additional charge.

Additional colors are available, consult your Rotary® representative for details.



Rotary Lift

2700 Lanier Drive
 Madison, IN 47250, USA



North / South America Contact Information

Sales: p 800.640.5438
 e userlink@rotarylif.com
 Tech. Support: p 800.445.5438
 e techlink@rotarylif.com

Global Contact Information

USA: 1.812.273.1622
 Canada: 1.905.812.9920
 Latin America / Caribbean: 1.812.273.1622
 Brazil: +55.11.4534.1995

Assistance for Government Purchasing

Government Sales: 800.445.5438 X5655



Lit# Rotary_SP016_Cargo_Cutsheet_2018.10

©2018 VEHICLE SERVICE GROUP™. Printed in U.S.A., All Rights Reserved.
 Unless otherwise indicated, ROTARY LIFT, VEHICLE SERVICE GROUP™, DOVER
 and all other trademarks are property of Dover Corporation and its affiliates.

For additional world wide contact information and a complete guide to our product offering, visit us on the web at rotarylif.com.