

# MC75-4D

## 7500KG . CAPACITY WIRELESS MOBILE COLUMN LIFT

Four, six or eight column configurations can accommodate light duty passenger vehicles and heavy duty trucks up to 60,000 kg!



### INVERTED HYDRAULIC CYLINDER

The hydraulic cylinder is inverted inside the carriage and the chrome piston rod is protected from debris and damage. This extends the life of the column and reduces maintenance frequency and cost

### BATTERY OPERATED WITH ON-BOARD MINN KOTA® CHARGER

During lift use, there are no power cords to clutter up the service bay with this waterproof charger - use it anywhere, even washbays

Battery purchased separately for international use

### FORKLIFT POCKETS

Provide a convenient way to relocate columns within your shop. Included with every lift, they are clearly labeled for easy handling

### EASY TO MOVE ADJUSTABLE FORKS

Improves set up time without the need for reducer sleeves - adjustment  
Wheel Rim Size: 228mm to 610mm

### WIRELESS COLUMN COMMUNICATION



### SPRING LOADED STEERING / BRAKING SYSTEM

No need to manually operate the jacks to move the columns - saves precious time *on every set up*

### TOUGH RUBBER-COATED WHEELS

Easily roll over dirt and debris that can jolt other lifts to a stop - wheels automatically retract under load



## THE VERSATILITY OF ROTARY'S MC75 WIRELESS MODEL

**Patented Wireless Column Communication** eliminates communication cables - faster and easier setup with no cords to get in the way *reducing technician's setup time by 75%.*


### WIRELESS BENEFITS:

**Position Memory** no need to configure columns for each lifting cycle...set it and forget it.

**Automatically re-establishes communication** between columns if signal is dropped - no need to reset communication errors.


**No RFID identifier wand to lose**

**Forward compatible / programmable** with quick, easy software update.

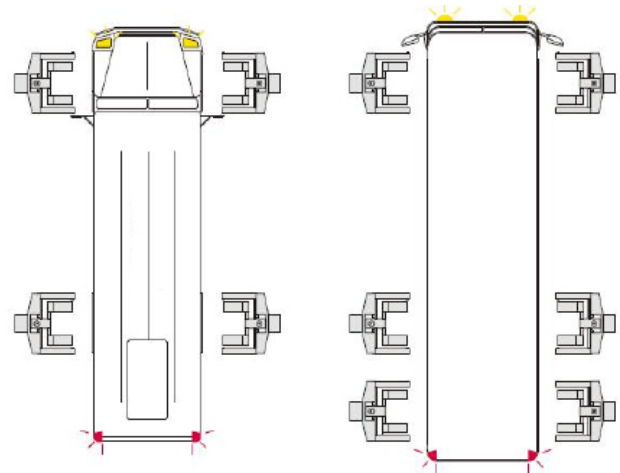

### PATENTED INTUITIVE CONTROL CONSOLE

Rotary's exclusive control console allows the lift to be fully controlled from any column

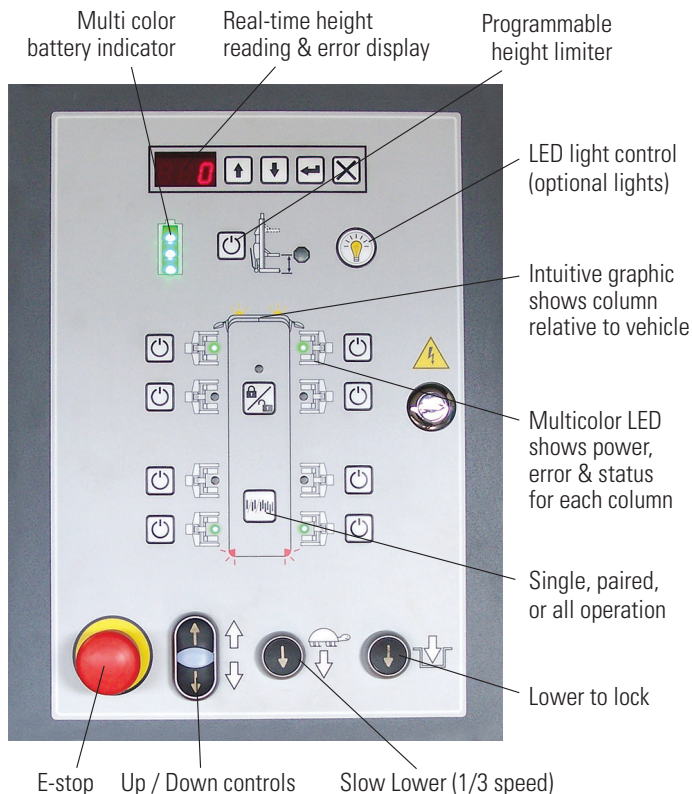

### MC75/ 7500 KG. COLUMN CAPACITY

MOBILE COLUMN LIFT	MC75-4D	MC75-6D	MC75-8D
Column configuration	4	6	8
Capacity	30,000 kg.	45,000 kg.	60,000 kg.
Rise	1753 mm		
Lifting cycles	12-14 per charge*		
Column width	1092 mm		
Wheel Rim Size	228 to 610 mm		
Clearance from fork to column	254 mm		
Speed of rise/Lower	75 seconds/70 seconds		
Charging voltage	110v-240v/50/60Hz charger**		

\* At rated capacity \*\*Call factory for alternate voltage



#### Rotary Lift Asia

No.1388,East Xiushan Road,  
Haimen,Jiangsu Province,China  
www.vsg-asia.com

#### Contact Information

Sales: p 86.21.60812756  
e vivian@rotaryliftdasia.com  
Tech. Support: p 86.513.81261262  
e luyao.huang@rotaryliftdasia.com