

# Scissor Lift **NBS40** Series



Shown Model: NBS40AL-45

## SPECIFICATIONS

TYPE	NBS40AL-45	NBS40A-45	NBS40-45	NBS40AL-48	NBS40A-48	NBS40-48
Configuration	Alignment Kit & Lifting Table	Alignment Kit	Flat Platform	Alignment Kit & Lifting Table	Alignment Kit	Flat Platform
Capacity	4000 kg	4000 kg	4000 kg	4000 kg	4000 kg	4000 kg
Lifting Height	1920 mm	1920 mm	1870 mm	1920 mm	1920 mm	1870 mm
Lifting-table Height	400 mm	-	-	400 mm	-	-
Lowered Height	345 mm	345 mm	280 mm	345 mm	345 mm	280 mm
Overall Length	4989 mm	4989 mm	4989 mm	5289 mm	5289 mm	5289 mm
Overall Width	2206 mm	2206 mm	2206 mm	2206 mm	2206 mm	2206 mm
Runway Length	4500 mm	4500 mm	4500 mm	4800 mm	4800 mm	4800 mm
Runway Width	625 mm	625 mm	625 mm	625 mm	625 mm	625 mm
Lifting-table Length	1400-2100 mm	-	-	1400-2100 mm	-	-
Motor Performance	3 kW	3 kW	3 kW	3 kW	3 kW	3 kW
Electrical Connection	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz
Air Pressure	6-8 bar	6-8 bar	6-8 bar	6-8 bar	6-8 bar	6-8 bar
Lifting-table Cap.	3000 kg	-	-	3000 kg	-	-

*Engineered To Perform... Built To Last!*

**FORWARD**  
**LIFT**

## Features

- ◆ Different options of configurations provide a wide range of applications ;
- ◆ Advanced electro hydraulic operating system ensures safety and reliability ;
- ◆ Emergency manual lowering in the event of power outage ;
- ◆ Open front and rear with no structural connection between platforms or bases increases work area for technicians ;
- ◆ Reliable, high quality composite bearings provide maintenance- free operation.



Shown Model:NBS40A-48



**1** Advanced electro hydraulic operating system ensures safety and reliability.




**2** Upper & lower limit switches improve operator safety and lift longevity.




**3** Control panel is easy to operate.



**4** Ramp kit for surface installation.

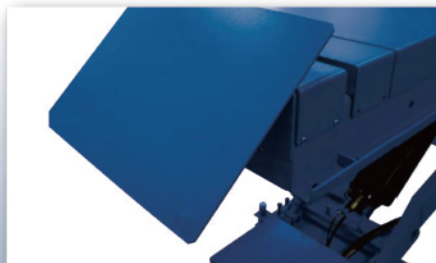

**5** Recess kit for flush mount.

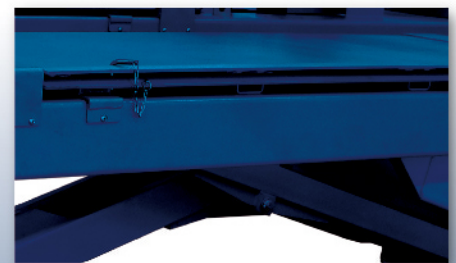

**6** Alignment kit AK-NBS40A-45 / AK-NBS40A-48.



**7** 3000 kg capacity lifting table for NBS40AL-45 and NBS40AL-48.



**8** Optional rolling jack NRJ45G and NRJ45G-AP.



**9** Optional cross beam CBK-ML50-4 minimizes tilt of the two runways while bias loading.