


Direct-Lift®

NBS40

Wheel Alignment Scissor Lift

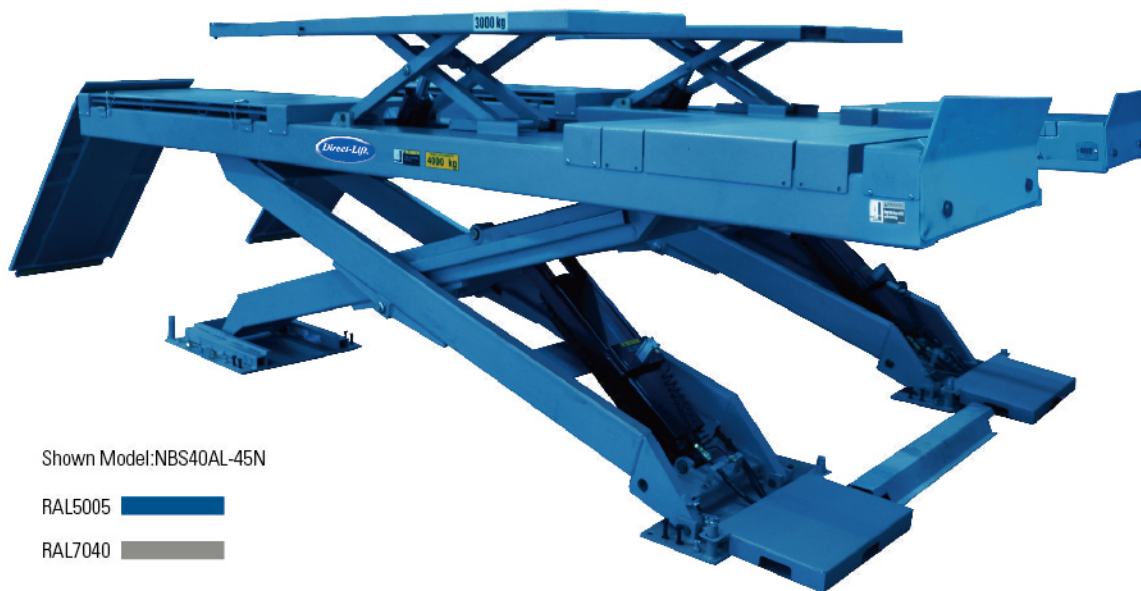

Shown Model: NBS40AL-45N

RAL5005 

RAL7040 

SPECIFICATIONS

	NBS40-45(N/I)	NBS40A-45(N/I)	NBS40AL-45(N/I)	NBS40-48(N/I)	NBS40A-48(N/I)	NBS40AL-48(N/I)
Capacity	4000 kg	4000 kg	4000 kg	4000 kg	4000 kg	4000 kg
Overall Length(N)	6200 mm	6200 mm	6200 mm	6500 mm	6500 mm	6500 mm
Overall Length(I)	4989 mm	4989 mm	4989 mm	5289 mm	5289 mm	5289 mm
Lifting Height	1870 mm	1920 mm	1920 mm	1870 mm	1920 mm	1920 mm
Lifting Table Height	-	-	400 mm	-	-	400 mm
Lowered Height	280 mm	345 mm	345 mm	280mm	345 mm	345 mm
Overall Width	2206 mm	2206 mm	2206 mm	2206 mm	2206 mm	2206 mm
Runway Length	4500 mm	4500 mm	4500 mm	4800 mm	4800 mm	4800 mm
Runway Width	625 mm	625 mm	625 mm	625 mm	625 mm	625 mm
Lifting Table Length	-	-	1400 ~ 2100 mm	-	-	1400 ~ 2100 mm
Motor Performance	3 kW	3 kW	3 kW	3 kW	3 kW	3 kW
Electrical Connection	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz	3PH 380V 50Hz
Air Pressure	6-8 Bar	6 ~ 8 Bar	6 ~ 8 Bar	6 ~ 8 Bar	6 ~ 8 Bar	6 ~ 8 Bar
Lifting Table Cap	-	-	3000 kg	-	-	3000 kg

CONFIGURATIONS

MODEL	CONFIGURATIONS
NBS40AL-45(N/I)	Alignment Kit & Lifting Table
NBS40A-45(N/I)	Alignment Kit
NBS40-45(N/I)	Flat Platform
NBS40AL-48(N/I)	Alignment Kit/Lifting Table
NBS40A-48(N/I)	Alignment Kit
NBS40-48(N/I)	Flat Platform

OPTIONAL ACCESSORIES

ITEM	MODEL
Long Ramp Kit	RMP-NBS40
Extended Ramp Kit	EXRMP-NBS40
Alignment Kit	AK-NBS40A-45 AK-NBS40A-48
Rolling Jack	NRJ45G / NRJ45G-AP

Direct-Lift®

NBS40

Wheel Alignment Scissor Lift



Shown Model: NBS40AL-45I

Features

- 1 Different options of configurations provide a wide range of applications;
- 2 Advanced electro hydraulic operating system ensures safety and reliability;
- 3 Emergency manual lowering in the event of power outage;
- 4 Open front and rear with no structural connection between platforms or bases increases work area for technicians;
- 5 Reliable, high quality composite bearings provide maintenance-free operation.



- 1** Advanced electro hydraulic operating system ensures safety and reliability.




- 2** Upper & lower limit switches improve operator safety and lift longevity.



- 3** Control panel is easy to operate.




- 4** Ramp kit for surface mount.

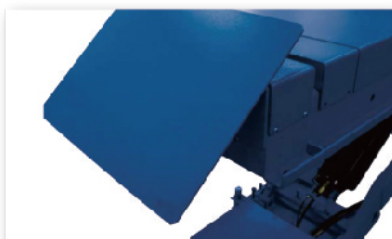

- 5** Recess kit for flush mount.



- 6** Base plates with levelling system to ease installation.

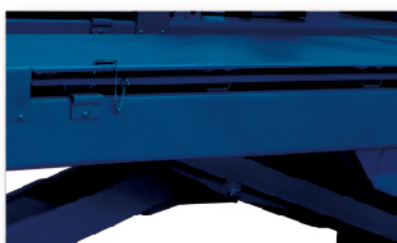

- 7** Alignment kit AK-NBS40A-45 / AK-NBS40A-48.



- 8** 3000 kg capacity lifting table for NBS40AL-45 and NBS40AL-48.



- 9** Optional rolling jack NRJ45G and NRJ45G-AP.

Direct-Lift®

*Technical data and composition presented in this cut sheet may vary.
Pictures reproduced are only indicative.

Rotary Lift Asia
No.1388, East Xiushan Road, Haimen,
Jiangsu Province, China, 226100
www.vsg-asia.com

Contact Information
Australia/New Zealand: 86.21.60812756
East Asia: 86.513.8226336
South East Asia: 91.80.41123421-26
India: 91.120.4099.555