

NC40

Two Post Lift



FEATURES

- Commercial grade non-clear floor two post lift;
- High-pressure, full stroke hydraulic cylinders in each column provide maximum lifting force;
- Limit switch prevents lifting too high;
- Reliable self-engaging locks with single point lock release;
- 4000 kg lifting capacity.



DESCRIPTIONS

- 01** Reliable self-engaging locks with single point lock release.



- 02** High strength 2 stage arms.



- 03** 3 stage pad assembly.




- 04** Single phase or three phase configurations available.



- 05** Door bumper prevents vehicle damage during use.



- 06** Convenient inspection hole for routine carriage maintenance and inspection.

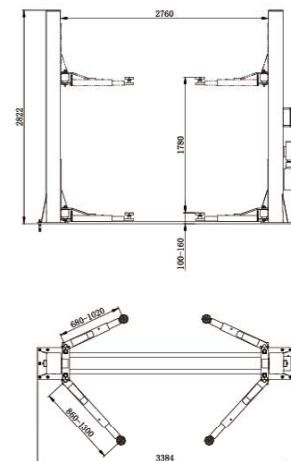

SPECIFICATIONS

Model	NC40
Capacity	4000 kg
Lifting Time	60 S
Lowering Time	18 40 S
Overall Length	2822 mm
Overall Width	3384 mm
Stroke	1780 mm
Min Adapter Height	100 mm
Width Between Columns	2760 mm
Short Arm Reach	680-1020 mm
Long Arm Reach	860-1300 mm
Motor	380 V / 3 PH / 50 Hz / 7.5 A / 2.2 kW 220 V / 1 PH / 50 Hz / 12 A / 2.2 kW

NCL40

Two Post Lift



FEATURES

- Commercial grade clear floor two post lift;
- High pressure, full stroke hydraulic cylinders in each column provide maximum lifting force;
- 3 stage long arms increase overall arm sweep accommodating a greater range of vehicles;
- Padded overhead limit bar prevents potential damage from lifting too high;
- Reliable, self-setting locking system with easy to reach lock latch handle;
- 4000 kg lifting capacity.



DESCRIPTIONS

- 01** Door bumper prevents vehicle damage during use.



- 02** 3 stage long arms increase overall arm sweep accommodating a greater range of vehicles.



- 03** 3 stage pad assembly.




- 04** Reliable self-engaging arm locks with easy to reach lock latch handle.



- 05** Easy to use and ergonomic operating controls.



- 06** Padded overhead limit bar prevents potential damage from lifting too high.

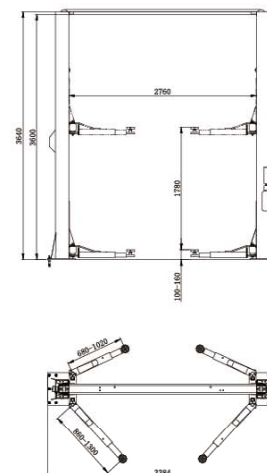

SPECIFICATIONS

Model	NCL40
Capacity	4000 kg
Lifting Time	60 S
Lowering Time	18 40 S
Overall Length	3640 mm
Overall Width	3384 mm
Stroke	1780 mm
Min Adapter Height	100 mm
Width Between Columns	2760 mm
Short Arm Reach	680-1020 mm
Long Arm Reach	860-1300 mm
Motor	380 V / 3 PH / 50 Hz / 7.5 A / 2.2 kW 220 V / 1 PH / 50 Hz / 12 A / 2.2 kW