

Direct-Lift PRO PARK SERIES FOUR POST LIFTS

GOLD CERTIFIED

D PARK 9PLUS

9,000 LB. CAPACITY

Features:

- Exclusive adjustable lock ladder leveling system
- allows your lift to be level at any height even on uneven floors
- Single point lock release
- 115 Volt operation with standard 115 volt plug provided
- · Steel approach ramps included
- Durable powder coat finish
- Available in black only

GOLD CERTIFIED


Pro Park 4-Post lifts are ALI Certified. This lift meets the highest industry safety and performance standards. Look for the Gold label.









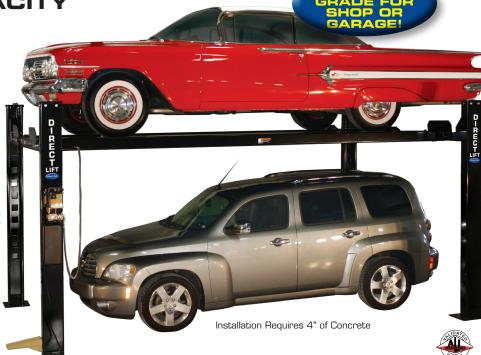

Shown: PP9PY11

9.000 lbs.

86"

81"

223.5"

132.5"

121"

192 5"

31"

21.5"

185"

5"

97"

97"

39"

79"


110 Volt, 1HP

2.350 lbs.

109.5"

Pro Park Lifts Include:





ONE (1) JACK TRAY

FOUR (4) DRIP TRAYS



PP9PLUS ACCESSORIES

PRO JACK 4500

4,500 lbs. capacity sliding bridge jack

WHEEL DOLLIES

1,000 lbs. capacity each

90° POWER **UNIT BRACKET**

Moves power unit to front of column for additional space. Must be mounted on rear side vs. front side of PP8 column.

PRO FLOOR 9

Floor panels to fill space between runways for versatile storage needs. Requires 8 panels for full floor.



WILL FOUR POST LIFTS FIT IN MY SHOP OR GARAGE?

Determine the space requirements needed for your four-post lift. Scan this code to watch the video or go to www.directlift and click on CEILING HEIGHT CALCULATOR.



Specifications subject to change without notice or liability.

PP9PLUS SPECIFICATIONS

Capacity

Lifting Height

Clearance Under Runways

Overall width with motor

Overall Length without

Approach Ramp Length

Approach Ramps

Runway Width

Runway Length

Runway Thickness

Drive through width

Height of Columns

Shipping Weight

Gold Certified

Motor

(Outside of tire to outside of tire)

Clearance Between Columns

Clearance Between Runways

Outside Runway to Outside Runway

Overall width without motor

Overall Length w/Approach Ramps

WWW.DIRECTLIFT.COM

CONTACT THE FACTORY DIRECT WAREHOUSE IN YOUR AREA 866-347-5438

